

Ionisation Processes in Water with Screened Electrodes

Sergey M. Korobeynikov, Alexandr V. Melekhov
Power Engineering Faculty,
Novosibirsk State Technical University
Novosibirsk, Russia
korobeynikov@corp.nstu.ru

Abstract—Prebreakdown processes in water with modified electrodes were studied by optical and electrooptical methods. Nonelectrode and postbreakdown streamers are registered. Macroscopic and microscopic electric fields close to anode and cathode breakdown channel are measured. The conductivities of both streamers are estimated.

Keywords—water, streamers, Kerr effect, measurement.

I. INTRODUCTION

Water as insulation medium is most suitable for pulsed power system due to high dielectric permittivity and high pulse electric strength. Power of pulse systems could be increased if electric field will be increased. Breakdown initiation on electrodes surface limits the pulse electric strength. That is why it was proposed to decrease electric field in the places of initiation with the help of special conductive layers close to electrodes [1,2]. These steps perform to increase the pulse electric strength of water insulation. Optical studies of breakdown and prebreakdown processes in case of screened electrodes were studied early.

The images of early stages of nonelectrode streamer in water are presented in the paper [3]. This kind of streamers sometimes appears in case of screened electrodes. Experimental setup and measurement technique are described early in [4, 5]. The experiments were performed with using voltage pulses with characteristic rise time $\tau_r \approx 0.6 \mu\text{s}$ and amplitude U up to 200 kV. There were used spherical electrodes 35 mm in diameter and the gap between them was $d = 3.5 \text{ mm}$ usually. Deionized water with the specific conductivity $\sigma \approx 10^{-7} (\text{Ohm}\cdot\text{cm})^{-1}$ went into the cell from water purifier closed loop. The registration of prebreakdown and breakdown processes was performed with the help of the shadow and Kerr methods by application a semiconductor laser with wavelength of $\lambda = 0.61 \mu\text{m}$ and pulse duration at half-height of 3 ns. The photo registration was made with the digital camera with resolution of $\approx 10 \mu\text{m}$ in the mode of opened diaphragm. The electrooptical scheme of measurements was adjusted for minimum light transmission in the absence of the electric field. Therefore, the radiation of secondary ionization processes after the breakdown was also

registered by the camera and it was superimposed on the image of the Kerr fringes.

The goal of the paper is the study of nonelectrode streamers peculiarities.

II. EXPERIMENTAL RESULTS

Figure 1 shows the shadow photo of the nonelectrode streamer in the case of a screened anode creating increased electric conduction near the anode and a lot of anode directed streamers initiated on cathode. The point of the initiation of a characteristic single nonelectrode streamer propagating simultaneously to the anode and cathode in the form of “half_streamers” is seen at the distance $\delta A \approx 1 \text{ mm}$ from its surface. Cathode directed “half streamer” has supersonic velocity and anode directed one has subsonic velocity.

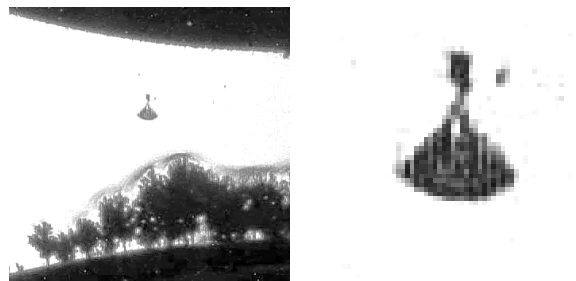


Fig. 1. Shadow photo (a): top, modified anode; bottom, metallic cathode; $U = 142 \text{ kV}$, $d = 3 \text{ mm}$, $t = 2.05 \mu\text{s}$; dark points are microparticles; (b) enlarged part of the interelectrode gap with the nonelectrode streamer.

Figure 2 demonstrates the final stage of breakdown, initiated by nonelectrode streamer. Here the breakdown channel luminescence is overlaid by Kerr picture. One could see that before breakdown initiation the electric field is increased in the centre of the gap. Its maximal value is 510 kV/cm. The direction of tree branches shows that breakdown channel develops both to cathode and anode. To all appearances the first prebreakdown event is supersonic “half-streamer” to the cathode [3]. When discharge channel touches

the cathode surface the potential of the cathode should be transferred to the subsonic half-streamer branches. Then this halfstreamer should reorganize into supersonic streamer developed into anode direction. For the proof of this picture it is important to estimate the channel conductivity.

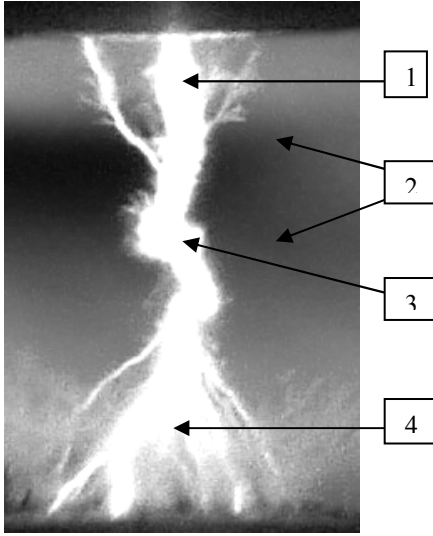


Fig. 2. Discharge channel in case of screened electrodes. Kerrogram and inherent glow of discharge. Voltage $U= 145$ kV, gap $d= 4$ mm. Kerr picture was obtained at $t_k = 1.45$ μ sec, breakdown occurred at $t_b = 1.7$ μ sec. 1 – anode streamer, 2 - Kerr darkening, 3- the place of breakdown origin, 4 - cathode streamer

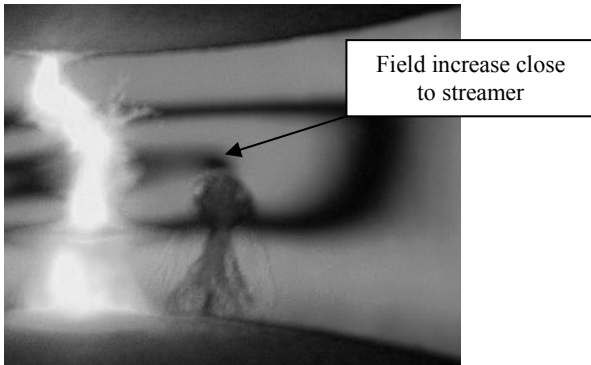


Fig. 3. Kerrogram and inherent glow of discharge. Voltage $U= 132$ kV, gap $d= 3.5$ mm. The moments of Kerr picture and breakdown were the same $t_k \approx t_b = 1.4$ μ sec. Electric field strength at the centre of the gap $E \approx 720$ kV/cm.

The kerrogram that perform to estimate cathode streamer conductivity is presented in Fig.3. Here it is several branches of cathode directed half-streamer that reach the cathode.

III. DISCUSSION

The electric field close to the tips of halfstreamers could be estimated if suppose streamers schematically (Fig.4).

The anode directed streamer with the characteristic size R_a has

a smaller surface than the cathode directed streamer with the size R_c . For the anode directed streamer $S_a \approx 2\pi$ (hemisphere), for the cathode directed streamer $S_k \approx (\pi/2)$ (the cone with the angle $\approx \pi/2$). At $R_a \approx 50$ μ m and $R_c \approx 250$ μ m the macroscopic field strength of the anode directed streamer E_{ma} is six times higher than that in front of the fan of the cathode directed streamers E_{mc} . The estimations [6] give the value of **microscopic** field close to the tips both of anode and cathode halfstreamers approximately 10 MV/cm, while **macroscopic** fields differs one from other: field close to cathode directed streamer has value 2 MV/cm, field close to anode directed streamer has value 300 kV/cm approximately.



Рис. 4. Principle scheme of the nonelectrode streamer (a) and superposition of fragments of the cathode and anode 2 streamers (b) [4] at $E \approx 800$ kV/cm, $t = 1.0$ μ s.

The Fig. 3 perform to estimate the conductivity of streamers. One could see the electric field close to anode directed halfstreamer has increased value. This conclusion could be done due to marginal changes in the intensity of Kerr fringes. According to expression [4]

$$I/I_0 = \sin^2(\pi B_k \int E_{\perp}^2 dx) \quad (1)$$

marginal changes in the intensity mean marginal changes in the phase in the expression (1). Here B_k is the Kerr constant ($B_k = 2,6 \cdot 10^{-12}$ cm/B²), E_{\perp} is the electric field component that is perpendicular to laser beam direction, x is the probing beam direction.

This peculiarity performs us to estimate the conductivity of anode streamer channel. If suppose that channel has high conductivity then the cathode directed part of the streamer will have the potential of cathode. Phase shift due to field increase close to nearly spherical anode directed part of the streamer could be estimated in supposition of spherical symmetry. It is simply to obtain that phase shift

$$\Delta\phi \approx \pi B_k \cdot (3\pi E_0^2 r_0 / 8) \quad (2)$$

where E_0 – electric field close to anode directed streamer, r_0 – radius of streamer zone. In case of high conductivity $E_0 \approx U/r_0$ and phase shift $\Delta\phi$ should be equal π approximately.

Really phase shift is small enough $\Delta\phi_{\text{real}} \ll \pi/2$. Taking into account both the change of intensity of Kerr fringe close to the streamer and the width ratio of dark and light Kerr

fringes one could estimate $\Delta\phi_{\text{real}} \approx (\pi/4 \div \pi/8)$. That is why the potential of anode directed half-streamer is two or three times less than U . What does it mean? It means that conductivity of cathode directed streamer is low and the streamer tip doesn't have electrode potential. In comparison anode directed streamer according analysis of experimental data [5] has high conductivity and streamer tips have electrode potential approximately.

CONCLUSION

In case of screened electrodes nonelectrode streamers appearance takes place. Anode directed half streamer has subsonic velocity and high conductivity. Cathode directed half streamer has supersonic velocity and low conductivity. **Microscopic** field close to the tips both of anode and cathode halfstreamers is approximately 10 MV/cm, while **macroscopic** fields differs one from other: field close to cathode directed streamer has value 2 MV/cm, field close to

anode directed streamer has value 300 kV/cm approximately.

REFERENCES

- [1] V. V. Vorov'ev, V. A. Kapitonov, E. P. Kruglyakov, and Y. A. Tsidulko, "Breakdown of water in a system with "diffusion" electrodes," *Sov. Phys.Tech. Phys.*, vol. 25, no. 5, pp. 598–602, May 1980.
- [2] Yanshin E.V., Korobeynikov S. M., Ovchinnikov I.T., et al, "Physical processes limiting the pulse energy release in liquid dielectrics," in *IEEE Pulsed Power Conference, Digest of Technical Papers*, vol.1, pp. 574 – 579, 1995.
- [3] S.M. Korobeynikov, A.V. Melekhov, "Nonelectrode Streamers in Deionized Water," *IEEE Trans. on Plasma Science*, vol. 39, no.11, pp. 2632-2633, Nov., 2011
- [4] S. M. Korobeynikov, A. V. Melekhov, and V. G. Posukh "Electrooptical Measurements of the Electric Field Strength in Water with Near_Electrode Conductive Layers," *Doklady Physics*, vol. 55, pp. 391–393, 2010.
- [5] Korobeynikov S.M., Melekhov A.V., Posukh V.G., et al, "Optical Study of Prebreakdown Cathode Processes in Deionized Water," *IEEE Trans. Dielect. Elect. Insul.*, vol.16, pp.504-508, 2009.
- [6] Korobeynikov S.M., Melekhov A.V. "Estimations of the Electric Field of Nonelectrode Streamers in Water", *High Temperature*, vol. 52, No. 1, pp. 129–131, 2014.